


# HOT ROLLED ANCHOR BARS (670/800)



diameter	dwarsdoorsnede A	gewicht	min. vloeispanning Re	min. breukspanning Rm	min. vloeikracht Re	min. breukkracht Rm
[mm]	[mm <sup>2</sup> ]	[kg/m]	[N/mm <sup>2</sup> ]	[N/mm <sup>2</sup> ]	[kN]	[kN]
18R	254	2,00	670	800	170	204
22R	380	2,98	670	800	255	304
25R	491	3,85	670	800	329	393
28R	616	4,83	670	800	413	493
30R	707	5,55	670	800	474	565
35R	962	7,55	670	800	645	770
43R	1.452	11,40	670	800	973	1.162
50R	1.963	15,41	670	800	1.316	1.571
57,5R	2.597	20,38	670	800	1.740	2.077
63,5R	3.167	24,86	670	800	2.122	2.534
75R	4.418	34,68	670	800	2.960	3.534

› Staalkwaliteit '670/800' › HRAB's zijn tevens leverbaar met dubbele corrosiebescherming

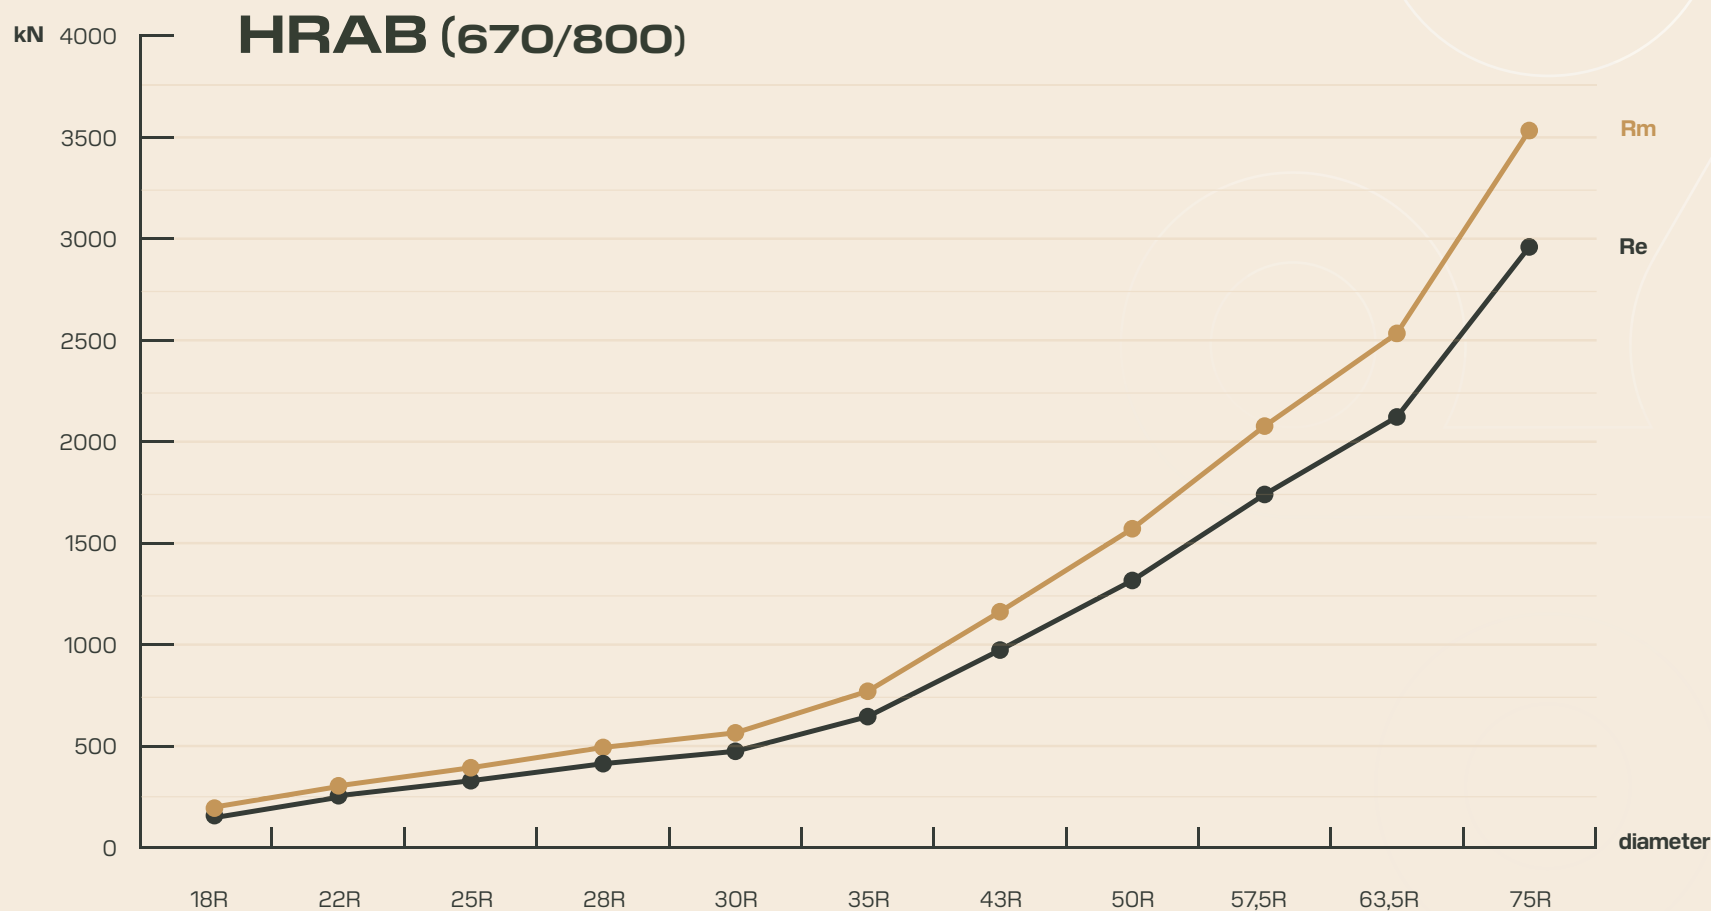

De weergegeven data is slechts indicatief en hieraan kunnen geen verdere rechten worden ontleend.